



B

B


Laser-cut ID may need smoothing.
Use wire wheel, Kratex wheel, or honing bore

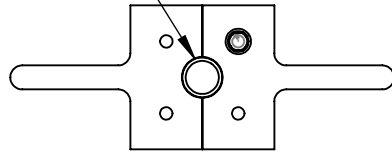

Slide weight
1 of 6

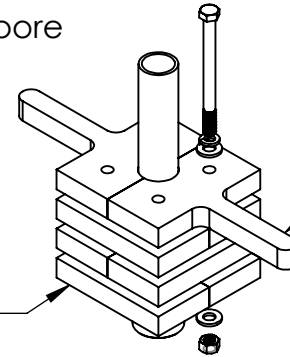


Slide weight with handle
1 of 2

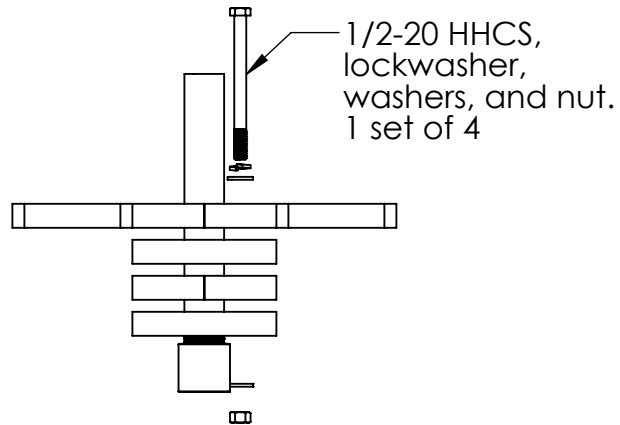


1/2-20 HHCS,
lockwasher,
washers, and nut.
1 set of 4

1 1/4 pipe

1 1/4 drive
coupling

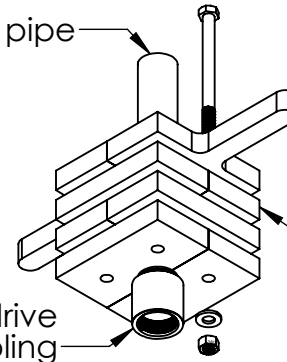

Assemble around pipe
in 90 degree alternation.

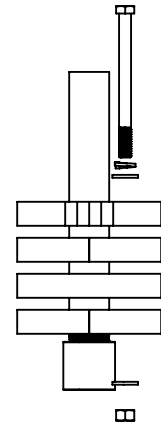

A

A

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: Slide Weight Assy		
		DIMENSIONS ARE IN INCHES	DRAWN	GUS				
		TOLERANCES:	CHECKED					
		FRACTIONAL ±	ENG APPR.					
		ANGULAR: MACH ± BEND ±	MFG APPR.					
		TWO PLACE DECIMAL ±	Q.A.			SIZE	DWG. NO.	REV
		THREE PLACE DECIMAL ±	COMMENTS:			A	20210113A	
		INTERPRET GEOMETRIC TOLERANCING PER:				SCALE: 1:8	WEIGHT:	SHEET 1 OF 1
		MATERIAL						
NEXT ASSY	USED ON	FINISH						
APPLICATION		DO NOT SCALE DRAWING						

2

1